

**Precise focussing and non-contact temperature measurement from -50 °C to 975 °C**

**Features:**

- Low and high temperature measurements of smallest spots up from 0.9 mm
- Double laser aiming marks real spot location and spot size at any distance
- Optics 75:1 and 50:1 with selectable focus
- CT laser F (fast) for scanning of fast moving low temperature objects up from 9 ms response time
- Usable up to 85 °C ambient temperature without cooling and automatic laser switch off at 50 °C
- Selectable analog outputs 0/4–20 mA, 0–5/ 10 V, thermocouple type K or J
- Optional plug in digital interfaces USB, RS232, RS485, CAN or Profibus DP



**General specifications**

Environmental rating	IP 65 (NEMA-4)
Ambient temperature <sup>1)</sup>	-20 °C ... 85 °C (sensing head, 50 °C with laser ON) -20 °C ... 85 °C (electronics)
Storage temperature	-40 °C ... 85 °C (sensing head) -40 °C ... 85 °C (electronics)
Relative humidity	10–95 %, non condensing
Vibration (sensor)	IEC 68-2-6: 3 G, 11–200 Hz, any axis
Shock (sensor)	IEC 68-2-27: 50 G, 11 ms, any axis
Weight	600 g (sensing head) / 420 g (electronics)

**Electrical specifications**

Outputs / analog	Channel 1: 0/4–20 mA, 0–5/ 10 V, thermocouple J, K Channel 2: sensing head temperature (-40 °C ... 85 °C as 0–5 V or 0–10 V), alarm output
Alarm output	24 V / 50 mA (open collector)
Optional	Relay: 2 x 60 V DC/ 42 V AC <sub>eff</sub> : 0.4 A; optically isolated
Outputs / digital	USB, RS232, RS485, CAN, Profibus DP, Ethernet (optional)
Output impedances	mA max. 500 Ω (with 5–36 V DC) mV min. 100 kΩ load impedance thermocouple 20 Ω
Inputs	Programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions)
Cable length	3 m (standard), 8 m, 15 m
Power Supply	8–36 V DC
Current draw	Max. 160 mA
Laser 635 nm	1 mW, ON/OFF via electronic box or software

**Measurement specifications**

Temperature range (scalable via programming keys or software)	-50 °C ... 975 °C
Spectral range	8–14 μm
Optical resolution (90 % energy)	75:1 CTlaser 50:1 CTlaser F
Selectable focus (CTlaser) <sup>1)</sup>	CF1: 0.9 mm @ 70 mm CF2: 1.9 mm @ 150 mm CF3: 2.75 mm @ 200 mm CF4: 5.9 mm @ 450 mm SF: 16 mm @ 1260 mm
System accuracy <sup>2)</sup> (at ambient temp. 23 ±5 °C)	±1 % or ±1 °C <sup>3),4)</sup> (CTlaser) ±1.5 % or ±1.5 °C <sup>3),4)</sup> (CTlaser F)
Repeatability (at ambient temp. 23 ±5 °C)	±0.5 % or ±0.5 °C <sup>2),3)</sup> (CTlaser) ±1 % or ±1 °C <sup>2),3)</sup> (CTlaser F)
Temperature resolution (NETD)	0.1 K / 0.5 K with CTlaser F
Response time <sup>5)</sup> (90 % signal)	9 ms CTlaser F / 120 ms CTlaser
Emissivity/ Gain (adjustable via programming keys or software)	0.100–1.100
Transmissivity/ Gain (adjustable via programming keys or software)	0.100–1.100
Signal processing (parameter adjustable via programming keys or software, respectively)	Peak hold, valley hold, average; extended hold function with threshold and hysteresis
Software	optris® Compact Connect

<sup>1)</sup> The functioning of the LCD display may be limited in ambient temperatures below 0 °C

<sup>2)</sup> Different spotsizes for CTlaser F (D:S = 50:1)


<sup>3)</sup> Whichever is greater

<sup>4)</sup> At object temperatures >0 °C, ε = 1


<sup>5)</sup> With dynamic adaption at low signal levels

## Optical specifications


SF optics 75:1

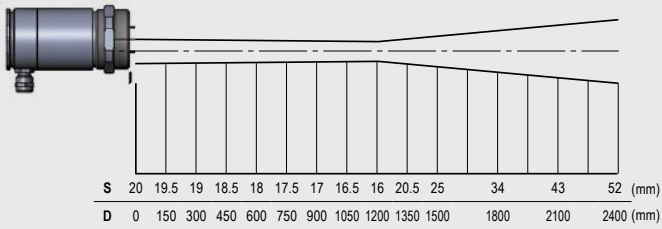


CF1 optics 75:1

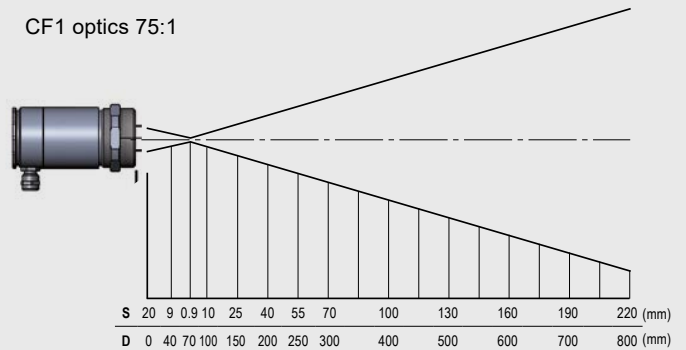


CF2 optics 75:1

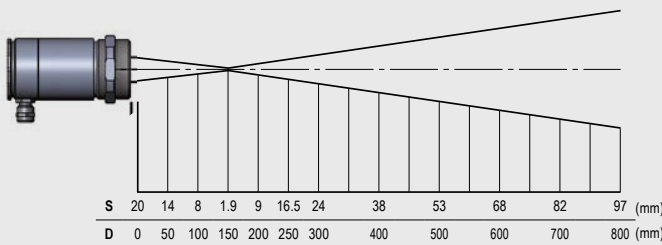

CF3 optics 75:1

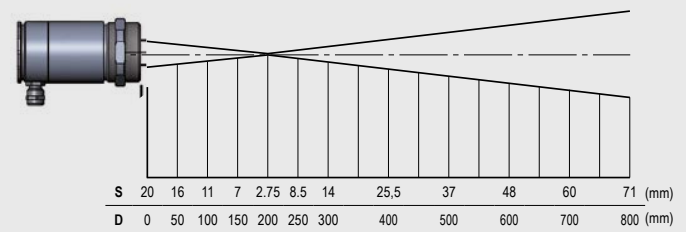


CF4 optics 75:1

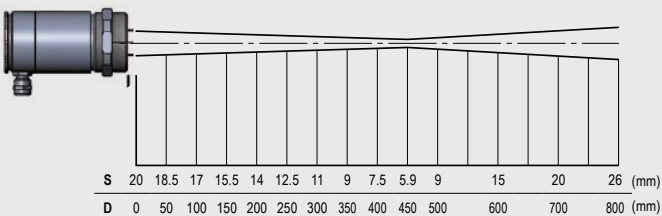

## Dimensions

Sensing head

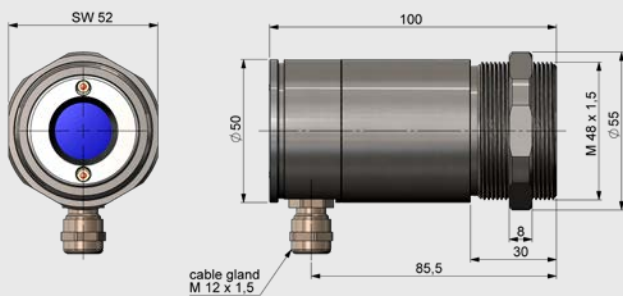

Electronics

